

## *Product Specifications*

**NAME: Simple Controller**




### **Summarization**

LED Simple Controller adopts the advanced micro-control unit, it is used for controlling a variety of lamp whose source of light is LED. For instance, point source of light, flexible light strip, wall washer lamp, glass curtain wall light and so on; It has many advantages such as low price, easy connection and simplicity to use. According to the actual need of customers, it can carry out jumpy changing, gradual changing, stroboflash and other effects of change.

### **Technical parameters**


- working temperature: -20-60℃
- supply voltage: DC5V, 12V, 18V, 24V optional (specify the required voltage on orders)
- output: 3 channels
- connection mode: common anode
- external dimension: L50xW35xH22 mm
- packing size: L105xW65xH40 mm
- net weight: 35g
- gross weight: 55g
- static power consumption: <1W
- output current: <4A (each channel)
- output power: 5V:<60W, 12V:<144W, 24V:<288W

## External Dimention

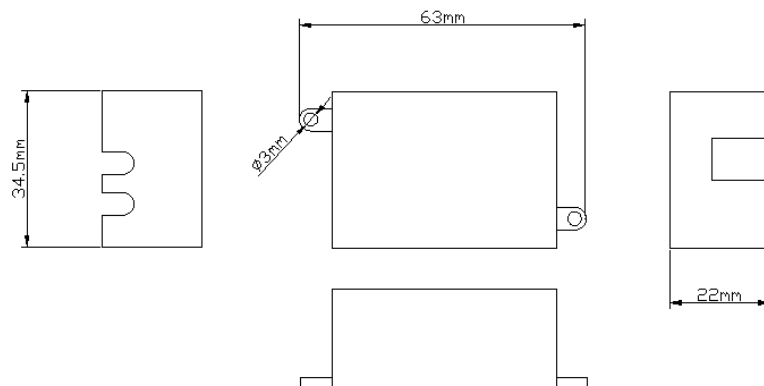


## Interface Specifications

Power output interface:



Adopt conventional DC power transposon as power input interface, and equip with DC plug.

Load output interface:



Adopt four sheath wires as connecting wires, **remark: black wire→+ red wire→R green wire→G yellow wire→B**

## Direction for Use

Automatically complete change after turning on the power, need not any setting; Please ensure short circuit can not occur between connecting wire before you turn on the power.

## Typical Applications

