

DEMASLED

SPECIFICATION FOR APPROVAL



Item: Rotatable COB LED Downlight

Issue Date : 2014/05/10



DEMASLED

Our Rotatable COB LED Downlight adopts special (optical lens/view angles) according to different lamp designs. Built-in high efficiency constant current driver, lower loss, with long lifespan of 3 years. Super brightness

Features:

- ★ The adoption of COB LED with long life span and low light decay.
- ★ Eco-friendly, no UV, infrared and lead
- ★ High CRI to reflect the real color of object
- ★ Uniform lighting effect delivered by COB LED, high efficacy
- ★ Special structure design to ensure excellent heat dissipation
- ★ Electric wave resistant
- ★ Qualified with ROHS approvals, No hazard of mercury or lead
- ★ Instant start, no flickering, no humming

Applications:

- Hotels
- Hospitals
- Commercial Complexes
- Conference / Meeting rooms
- Factories & Offices
- Residential / Institution Buildings
- Hall



DEMASLED

Mechanical Dimensions:




Size of holes

Technology parameter:


Model	XB3016
PowerConsumption	30
Color Temperature	3000/4000 ± 3%
Luminous flux	2300 ± 5%
Input Voltage	AC100-240V
CRI	>80
Power factor	>0.9
View Angel	15° /24°
Tube Material	AL
Right-left rotatable angle	360°
Upward rotatable angle	8°
down ward rotatable angle	30°
Life Span	3 years

DEMASLED

Color Coordinates:

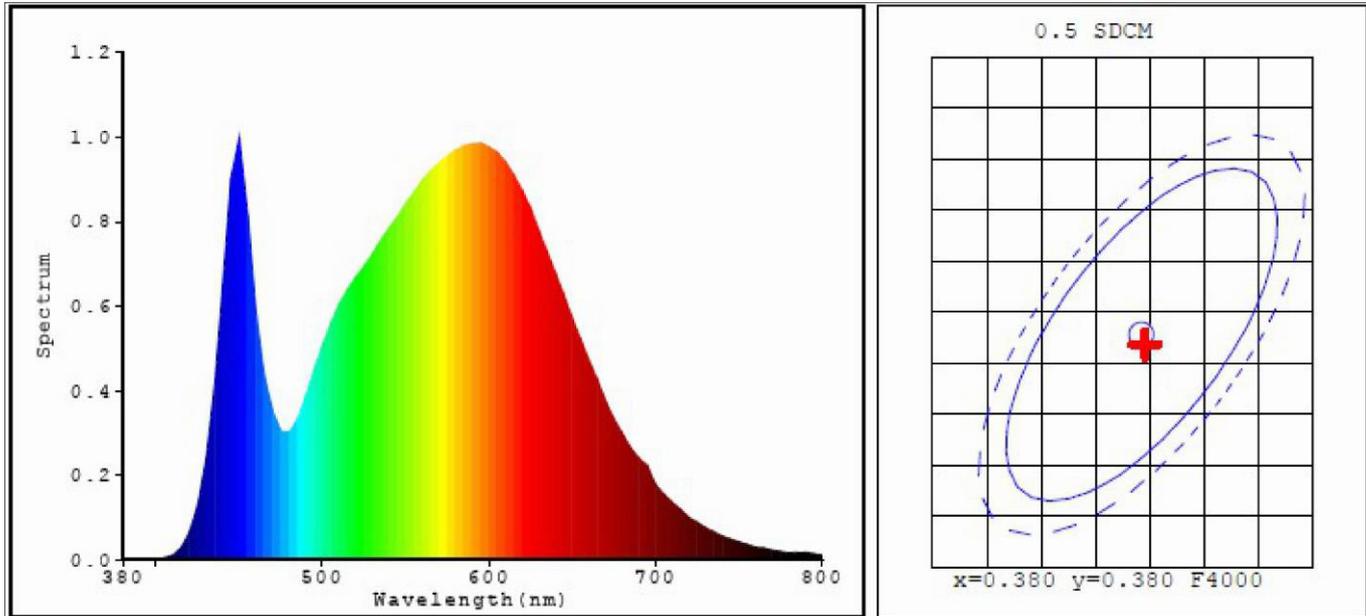

LED Lumen Attenuation:

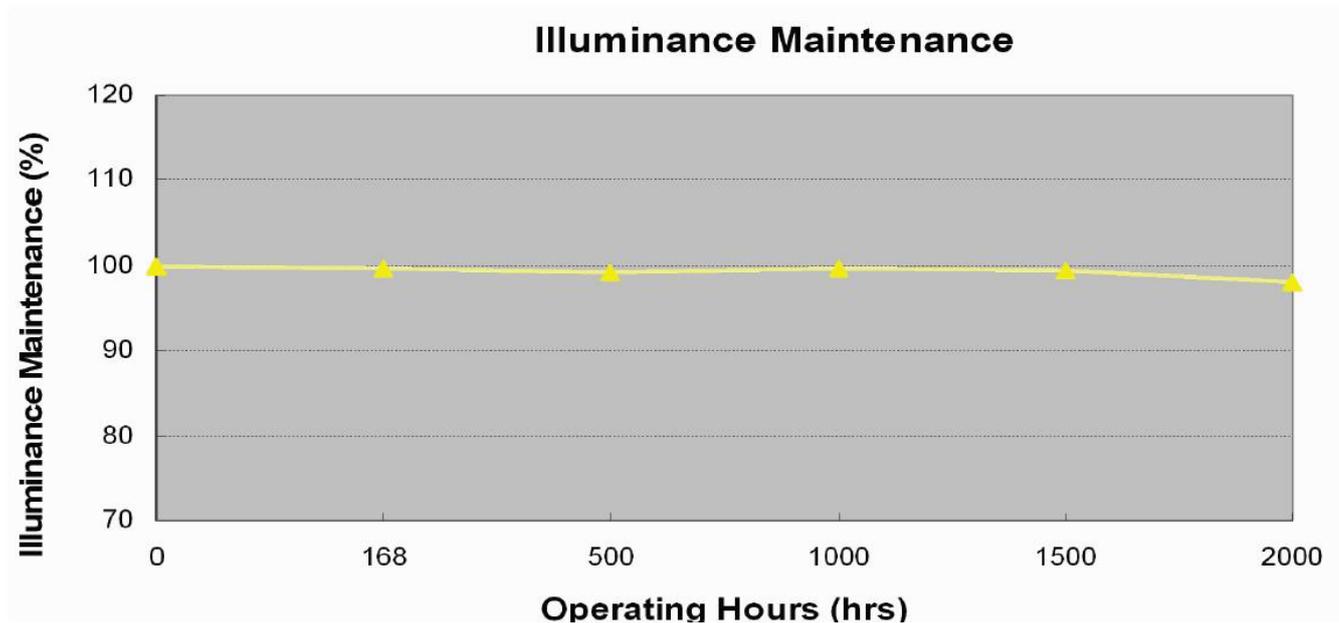

Testing condition: None break operation

DEMASLED

Note:

The light is not suitable to be installed on the surface of flammable material.

Do not cover the light when it is working.

To maintain the life span and performance of the light, it's suggested to clean the light every half year

When cleaning the light, please avoid any liquid getting into the light to causeshort circuit or leakage of electricity.

Packing:

Model	Package Size	NG.	GW.	Outer Carton	Uantity
XB3016	158*116	0.78	0.88	500*325*265	12

Packing diagram

